

STONE COMPOSITE WALL PANELS

Technical Data

Painted Composites - Durapan





Stone Composite, dry joint, rainscreen, pressure equalized wall panel systems that are truly dry joint... without sealants or gaskets.

SWIRNOW
ARCHITECTURAL
WALL SYSTEMS LLC

Panel Depth:	1 ¼"
Panel Joints:	½" nominal
Material Thickness:	1/8" - Standard 1/4" - Massive
Weight:	2 - 3 pounds per square foot
Surface:	Acrylic or Fluoropolymer Finish
Look:	Painted Opaque
Colors:	4 Metallic 4 Primary 12 Standard Custom & PPG colors also available
Packaging:	Boxes on skids
Details:	Extrusions Formed Flashing
Corners:	Custom bonded Formed flashings Pre-fabricated
Substrate Requirements:	A substrate is required A weather barrier is required Subgirts are required
Testing:	ASTM E 331 for Water penetration - passed ASTM E 330 for Structural - 65 psf



Standard Sizes:

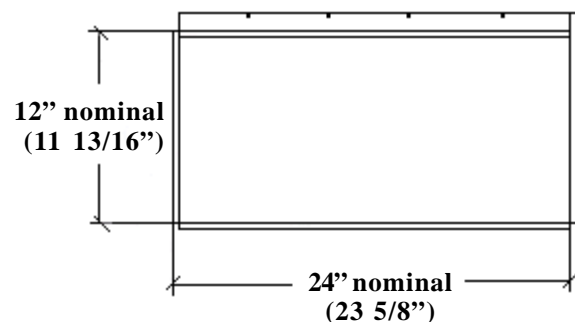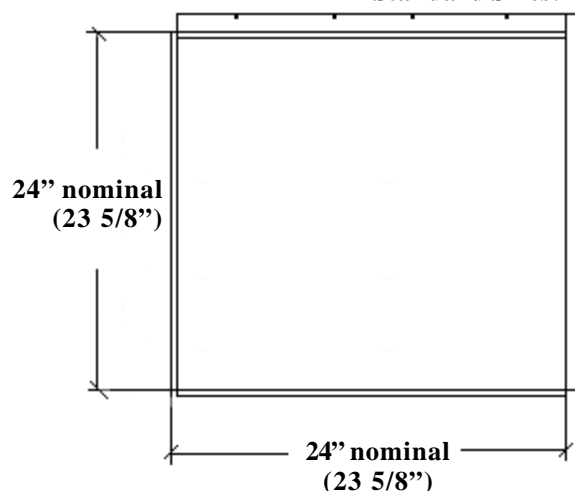

Main Office
2801 Sisson Street
Baltimore, Maryland
21211-2902
Fax: 410.338.1124
800.338.8833
410.338.1122
www.swirnow.com

This information is subject to change without notice.

Swirnow Building SystemsSM is a registered service mark of Swirnow Building Systems Management LLC used under license