

DRI-DESIGN[®] METAL WALL PANELS

Technical Data


Copper




Copper, dry joint, rainscreen, pressure equalized wall panel systems that are truly dry joint...without sealants or gaskets.

SWIRNOW
ARCHITECTURAL
WALL SYSTEMS LLC

- Panel Depth:** 1 ¼"
- Panel Joints:** ½" nominal
- Material Thickness:** Varies and is dependent on the panel size.
The most common thicknesses are .062 and .050.
- Panel Corners:** Soldered
- Weight:** Varies between 2½ pounds per square foot and 3½ pounds per square foot
- Finishes:** Bright copper and Pre-Patinated
- Best Size:** For lowest cost - 36" x 36"
- Packaging:** Polymask on all panels
Boxes and/or crates
- Details:** Formed Flashing
- Corners:** Custom soldered
Formed flashings
- Substrate Requirements:** A substrate is required
5/8" plywood preferred
A weather barrier is required
- Testing:** ASTM E 283 for Air - passed
ASTM E 331 for Water - passed
ASTM E 330 for Structural - 65 psf



Size Limitations:

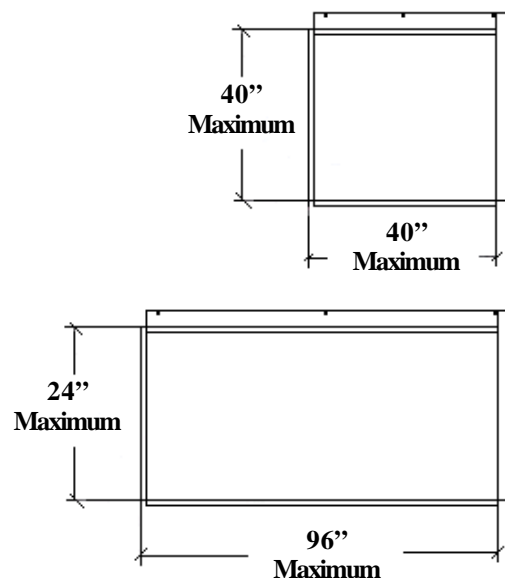

Main Office
2801 Sisson Street
Baltimore, Maryland
21211-2902
Fax: 410.338.1124
800.338.8833
410.338.1122
www.swirnow.com

This information is subject to change without notice.

Swirnow Building Systemssm is a registered service mark of Swirnow Building Systems Management LLC used under license